



PCT / SE 2004 / 000045



11-02-2004

INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

RECEIVED	
18 FEB 2004	
WIPO	PCT

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.


In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 6 January 2004

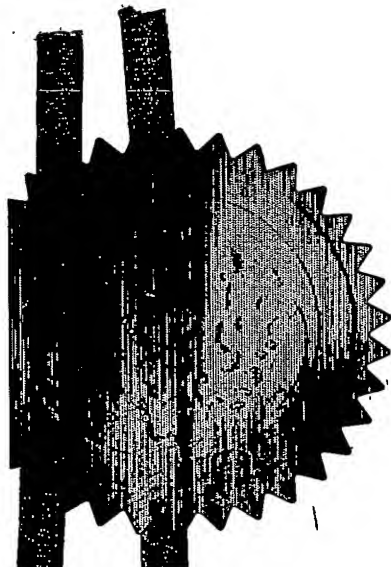

# Patents Form 1/77


Patents Act 1977  
(Rule 16)



NO REC  
1/77

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

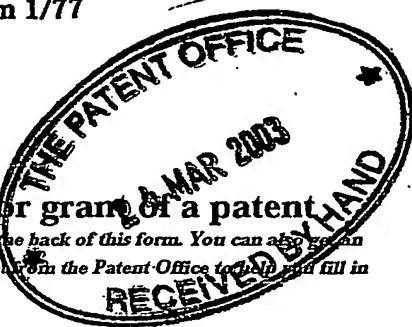

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

24 MAR 2003

1. Your reference

P17413GB-NHF/SJP/mm

2. Patent application number

(The Patent Office will fill in this part)

0306749.3

25MAR03 E794783-2 D00389

P01/7700 0.00-0306749.3

3. Full name, address and postcode of the or of each applicant (underline all surnames)

AUTOLIV DEVELOPMENT AB  
S-447 83 Vargarda  
SWEDEN

Patents ADP number (*if you know it*)

321018009

If the applicant is a corporate body, give the country/state of its incorporation

SWEDEN

4. Title of the invention

IMPROVEMENTS IN OR RELATING TO AN AIR-BAG

5. Name of your agent (*if you have one*)

Forrester Ketley & Co.

"Address for service" in the United Kingdom to which all correspondence should be sent (*including the postcode*)

Forrester House  
52 Bounds Green Road  
London  
N11 2EY

Patents ADP number (*if you know it*)

133001 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (*if you know it*) the or each application number

Country

Priority application number  
(*if you know it*)

Date of filing  
(*day / month / year*)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(*day / month / year*)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (*Answer 'Yes' if:*

YES

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

## Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	6
Claim(s)	1
Abstract	1
Drawing(s)	1

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*) TWO

Request for preliminary examination and search (*Patents Form 9/77*) ONE

Request for substantive examination (*Patents Form 10/77*)

Any other documents  
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature	Date
<i>Forrester Ketley &amp; Co.</i>	21 March 2003

12. Name and daytime telephone number of person to contact in the United Kingdom S.J. PARRY  
(020) 8889 6622

### Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

### Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

PATENTS ACT 1977

P17413GB - NHF/ns

5 DESCRIPTION OF INVENTION

**"IMPROVEMENTS IN OR RELATING TO AN AIR-BAG"**

10

**THE PRESENT INVENTION** relates to an air-bag and more particularly relates to an air-bag in the form of an inflatable curtain.

15

It has been proposed previously to provide an air-bag in the form of an inflatable curtain, the air-bag being configured to be mounted in a motor vehicle along the roof line of the vehicle above the doors. The air-bag is associated with a gas generator to inflate the air-bag in the event that an accident should occur. The inflated air-bag is intended to extend between an occupant of the vehicle and the adjacent doors.

20

Many designs of inflatable curtain have been proposed previously but reference is made to Figure 1 of the accompanying drawings which illustrates a typical design.

25

Referring initially to Figure 1, an air-bag 1 in the form of an inflatable curtain has a main region 2 of generally rectangular form, the main region incorporating a first inflatable zone 3 divided into a plurality of cells 4 by seams 5, and a second inflatable zone 6 divided into cells 7 by means of seams

8. The two inflatable zones 3 and 6 are separated by a substantially uninflatable zone 9.

5 A first projection 10 is provided at one end of the lower edge of the inflatable curtain, to be connected to a strap, and a further projection 11 is provided at the other end of the lower edge to be connected to a further strap.

10 Along the upper edge of the air-bag, a gas flow duct 12 is provided which communicates with the inflatable cells of the first zone 3 and the inflatable cells of the second zone 6. The gas duct 12 is provided with an end portion 13 configured to be connected to a gas generator. The uppermost edge 14 of the air-bag is provided with a plurality of evenly spaced mounting tabs 15 each being provided with an aperture 16.

15 The air-bag as described is one example of many different designs of air-bag of the inflatable-curtain type that are in use.

20 In the described arrangement, the mounting tabs 15 are formed of a single layer of fabric. However, it has been found that the mounting tabs 15 may not be sufficiently strong to withstand the forces applied to the mounting tabs during deployment of the air-bag. Here it is to be understood that the air-bag is deployed within a very brief period of time in response to a signal from a sensor responsive to a side impact or rollover situation. The gas that inflates the air-bag is injected into the gas flow duct 12 in a very aggressive manner, 25 and it is not unknown for the mounting tabs 15 to become damaged as a result.

It has been proposed to modify the mounting tabs either by providing a stitched re-enforcement or, alternatively, by forming the tabs by initially providing an over-sized piece of fabric at the position where each tab is to be,

and then folding the fabric over and effecting a stitching operation to provide a mounting tab of enhanced strength. Such techniques are, however, undesirable as they are labour intensive and therefore costly.

5           The present invention seeks to provide an improved air-bag.

Accordingly, the present invention provides an air-bag, the air-bag comprising at least one inflatable region, the air-bag having an upper edge provided with a plurality of mounting tabs, each mounting tab defining an axis,  
10   the axis of each mounting tab being inclined inwardly toward a region above the centre of the air-bag.

Preferably, the air-bag is in the form of an inflatable curtain.

15           Advantageously, each tab is inclined at an angle between  $30^{\circ}$  and  $80^{\circ}$ .

Conveniently, the tabs located towards each end of the air-bag are inclined with a more acute angle than tabs located towards the centre of the air-bag.

20           Preferably, each tab is formed of woven fabric, the fabric having orthogonal warp yarns and weft yarns; the axis of each tab making an acute angle with the orthogonal matrix of the warp and weft yarns.

25           In order that the invention may be more readily understood, and so that further features thereof may be appreciated, the invention will now be described, by way of example, with reference to the accompanying drawings in which:

FIGURE 1, as described above, is a diagrammatic view of a prior proposed air-bag; and

5       FIGURE 2 is a corresponding diagrammatic view of an air-bag in accordance with the invention.

As will be appreciated, most of the features of the air-bag of Figure 2 are the same as the corresponding features of the air-bag of Figure 1 and will thus  
10   not be re-described in detail at this time.

The primary difference between the air-bag of Figure 2 and the air-bag of Figure 1 is the nature of the mounting tabs. The upper edge 14 of the air-bag 2 shown in Figure 2 is provided with four mounting tabs 20, 21, 22, 23 spaced  
15   from one another at respective positions along the upper edge 14. Each mounting tab is in the form a single thickness layer of fabric and each tab is provided with a respective bolt hole 24, 25, 26, 27.

It can be seen that the tabs 20,21,22,23 do not extend perpendicularly  
20   from the upper edge 14, but instead each tab 20,21,22,23 is inclined to define an acute angle with the upper edge 14 of the air-bag.

The left-hand most tab 20 is inclined to the upper edge 14 at an angle  $\alpha$  which may be between 30° and 80° but which, in the described embodiment, is  
25   approximately 45°. The tab 20 is thus inclined quite steeply relative to the uppermost edge 14 of the inflatable curtain.

The next adjacent tab, moving towards the centre of the air-bag, is the tab 21 which is inclined at an angle  $\beta$ , the angle  $\beta$  again being between  $30^\circ$  and  $80^\circ$  but in the illustrated embodiment being  $63^\circ$ . Thus the tab 21 is not inclined as steeply as the first described tab 20. Both of the tabs 20 and 21 are inclined in a direction towards a point located above the centre of the air-bag.

The next adjacent tab, the tab 22, is on the opposite side of the central part of the air-bag and again is inclined relative to the upper edge 14 at the angle  $\beta$  which, in the described embodiment, is  $63^\circ$ , but is inclined in the opposite sense relative to the tab 21, thus again being inclined towards the said point located above the centre of the air-bag.

Finally the tab 23 is inclined at the angle  $\alpha$  which is again  $45^\circ$ , again being inclined towards the central point above the centre of the air-bag. It will therefore be seen that the illustrated arrangement has a substantially symmetrical arrangement of the tab angles, about a line of symmetry lying vertically through the central region of the air-bag. However, in other embodiments (not illustrated), it is possible for the tab angles to be arranged in a non-symmetrical manner.

20

In a conventional air-bag of the type described above, the warp and weft yarns as shown schematically at 28 are co-aligned with and perpendicular to the upper edge 14 of the air-bag. Thus, as the tabs 20, 21, 22, 23 are formed from the fabric of the air-bag, each tab is inclined to the orthogonal axes defined by the warp and weft yarns by either the angle  $\alpha$  or the angle  $\beta$ .

25

It has been found that a tab which is inclined to the warp or weft direction is able to elongate with a given load to a greater extent than a tab



which is aligned with the warp or weft axes of the fabric. It is thus envisaged that an air-bag provided with tabs as described above will be able to withstand substantial applied forces, with the loads from those forces being absorbed by the tabs, without the tabs breaking.

5

The tabs may be woven using a conventional hop-sack weave.

In the present specification "comprises" means "includes or consists of" and "comprising" means "including or consisting of".

10

The features disclosed in the foregoing description, or the following claims, or the accompanying drawings, expressed in their specific forms or in terms of a means for performing the disclosed function, or a method or process for attaining the disclosed result, as appropriate, may, separately, or in any combination of such features, be utilised for realising the invention in diverse forms thereof.

15

**CLAIMS:**


- 5 1. An air-bag, the air-bag comprising at least one inflatable region, the air-bag having an upper edge provided with a plurality of mounting tabs, each mounting tab defining an axis, the axis of each mounting tab being inclined inwardly toward a region above the centre of the air-bag.
- 10 2. An air-bag according to Claim 1 wherein the air-bag is in the form of an inflatable curtain.
3. An air-bag according to Claim 1 or 2 wherein each tab is inclined at an angle between 30° and 80°.
- 15 4. An air-bag according to any one of the preceding Claims wherein the tabs located towards each end of the air-bag are inclined with a more acute angle than tabs located towards the centre of the air-bag.
- 20 5. An air-bag according to any one of the preceding Claims wherein each tab is formed of woven fabric, the fabric having orthogonal warp yarns and weft yarns, the axis of each tab making an acute angle with the orthogonal matrix of the warp and weft yarns.
- 25 6. An air-bag substantially and described with reference to and as shown in Figure 2 of the accompanying drawings.
7. Any novel feature or combination of features disclosed herein.

**ABSTRACT**

5

**“IMPROVEMENTS IN OR RELATING TO AN AIR-BAG”**

- 10 An air-bag is disclosed which preferably takes the form of an inflatable curtain  
The air-bag comprises at least one inflatable region (3,6) and has an upper edge  
(14) provided with a plurality of mounting tabs (20,21,22,23). Each mounting  
tab (20,21,22,23) defines an axis which is inclined inwardly toward a region  
above the centre of the air-bag. Preferably, each tab is inclined at an angle  
15 between 30° and 70°.

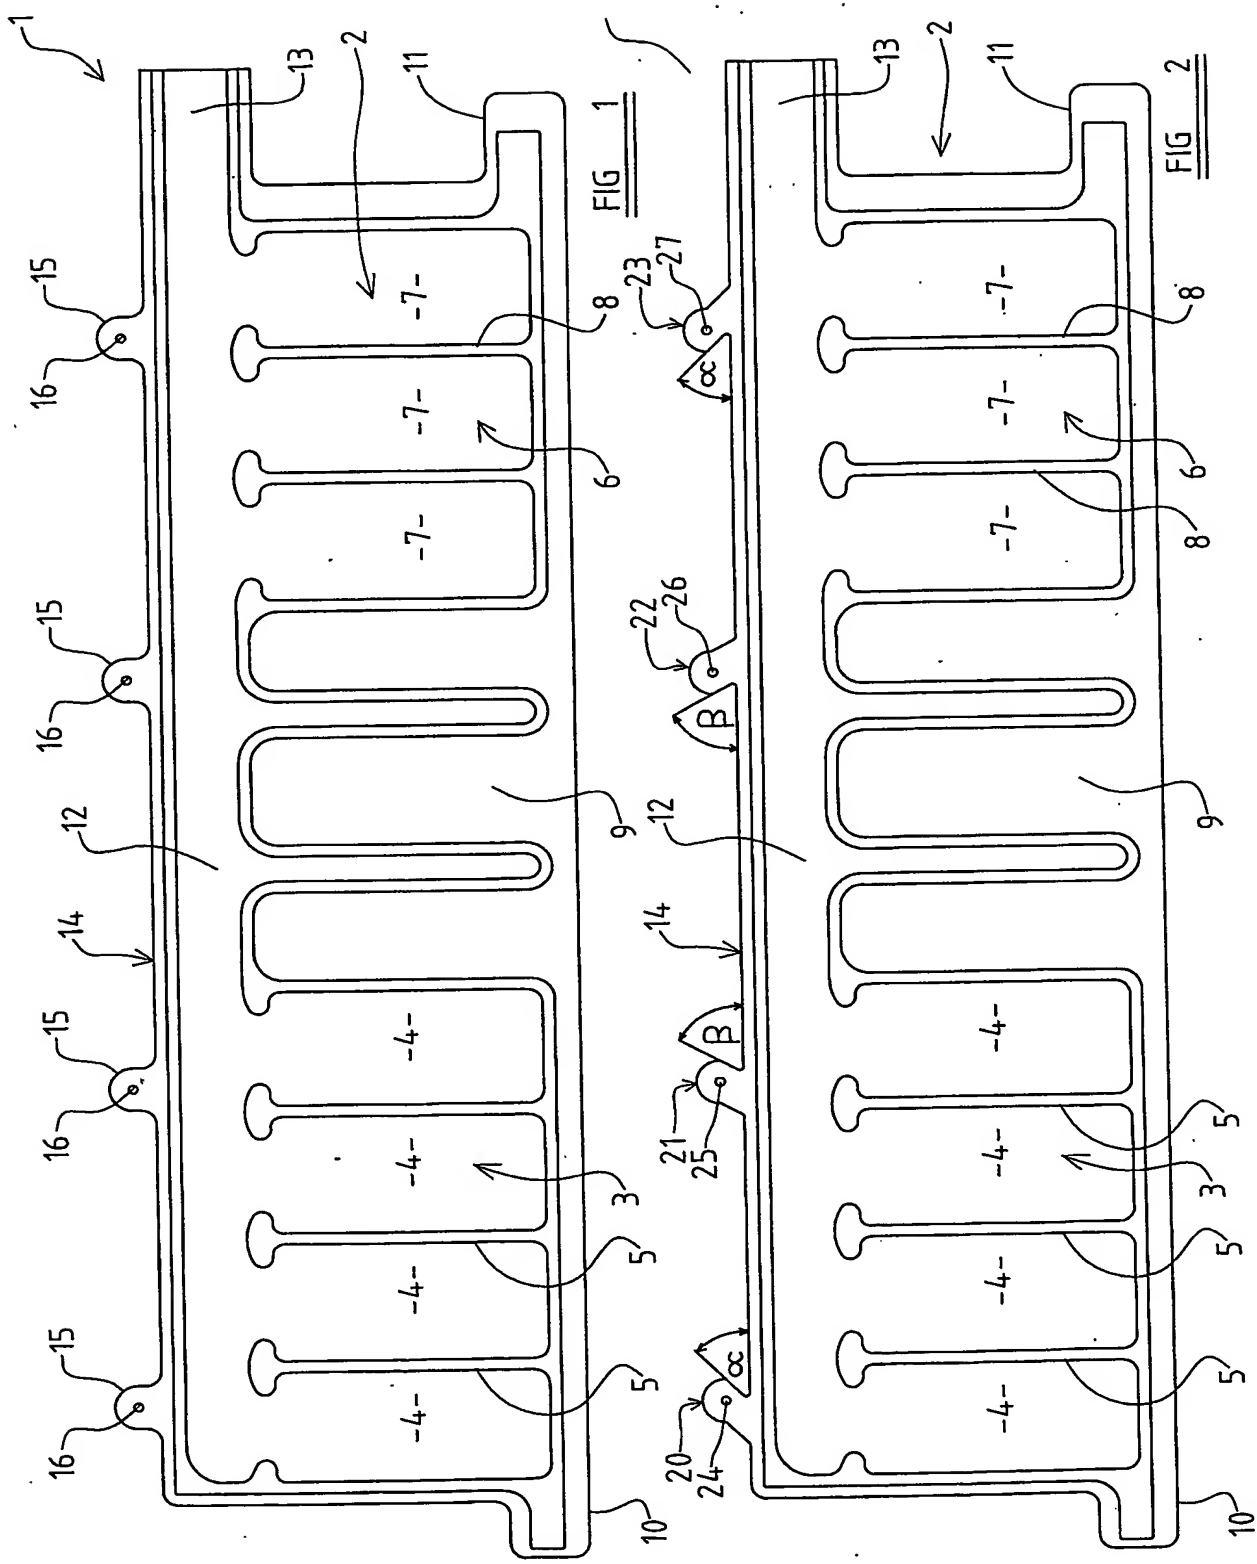

PCT Application  
**PCT/SE2004/000045**

